

Technical data

		669I SL	669I LL
Weight	g/m ²	20	40
Thickness	mm	0,30	0,45
Roll length	m	1000	1000
Roll width	m	1,0	1,0
Resin uptake	kg/m ²	350	500
Binder		Acrylate	Acrylate
Fibre		Polyester	Polyester
Elongation	%	>10	>10


Lantor Finishmat®
669I grades provide
excellent chemical and
weather resistance

Lantor Finishmat® 669 I

- Chemical and weather resistance
- Smooth surface
- Controlled resin drainage
- Prevention of fibre print through
- High abrasive resistance
- High tensile strength
- Easy to process
- Good resin retention
- Compatible with thermoset resins
- Excellent resin wet-out

Applications of Lantor Finishmat® 669 I

- Industrial (pipes, containers, tanks, profiles, rods)
- General Pultrusion and Filament winding application

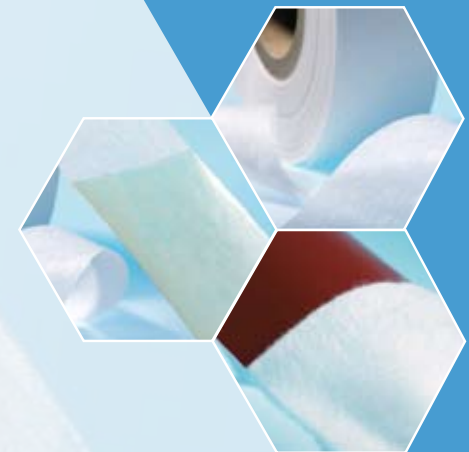

The right protection

- Smooth surface
- Excellent resin wet-out
- High tensile strength

The information contained in this document has been compiled in good faith by Lantor B.V., but nevertheless no representation or warranty is given as to the accuracy or completeness of the (technical) information provided herein. Please note, the data presented in this document are typical values only, and should not be used as specification or engineering data. Lantor B.V. can not be held liable for any damages arising from any (printing) errors or omissions in this information. Lantor B.V. reserves the right to make changes with respect to the information provided at any time without further notice.

For more information:

Lantor BV

Verlaat 22, P.O. Box 45
3900 AA Veenendaal

The Netherlands

Tel.: +31 (0)318 - 537 111

Fax.: +31 (0)318 - 537 420

E-mail: lantorbv@lantor.nl

Or visit our website: www.lantor.nl